Model

GVSD09116FT **MORGAN NOMINAL** **DRY FREIGHT "FAST TRACK" VAN BODY 16FTPA - Morgantown**

Body Dimensional Information

Inside Height:	91.12
Inside Length:	191.13
Inside Width:	92.13
Rear Door Opening (W x H):	88Wx85.25H

Chassis Information

Make:	FORD
Model:	F-450 (2021 or Newer Model) Gas (F4G/F4H)
Expected Date:	
Color:	WHITE
Rear Axle:	Single (1)
Air Horns on Cab Roof:	No

Year:	2023
WB:	205.3
FW:	34
FOB:	117
Vert. Exh.:	No

Note: Body dimensional information above for reference only. These dimensions may change based on any special pricing items included in this quotation.

OPTION	DESCRIPTION
MBB Assembly	DRY FREIGHT "FAST TRACK" VAN BODY 16FT NOMINAL
SUBFRAME	3" I BEAM CROSSMEMBERS ON 16" CENTERS WITH 4" LONGRAIL W/O WHEELPANS MYLAR TAPE IS APPLIED BETWEEN ALL STEEL SUBFRAME COMPONENTS AND EXTRUDED ALUMINUM LOWER BOTTOM RAILS TO PREVENT CORROSION
MOUNTING	FULL MOUNT U-BOLT SPACER FOR FORD SUPERDUTY CHASSIS WITH REINFORCED FRAME MOUNTING WOOD MODIFCATION REQUIRED FOR FORD SUPERDUTY CHASSIS WITHOUT MID FRAME REINFORCEMENT MUDFLAPS-NEW HARRISBURG 24" X 36"
MUDFLAPS	PLATE AND "T" BRACE REINFORCEMENT INSTALLATION
FLOOR	1 1/8 IN. LAMINATED HARDWOOD FASTENED TO SUBFRAME. FLOOR BOARDS ARE SHIP LAPPED AND PRE-UNDERCOATED FOR PROTECTION FROM ELEMENTS.
MOUNTING	UNDERCOATING WATER BASED UNDERCOATING APPLIED TO ROADSIDE AND CURBSIDE EXTERIOR AND INTERIOR OF LONG RAILS AND WHEEL PANS, AS APPLICABLE, EXCLUDING ALL OTHER FLOOR AND SUBFRAME EXTERIOR COMPONENTS
SIDE WALL	EXTRUDED ALUMINUM TOP AND BOTTOM RAILS WITH 1 3/8 IN. DEEP GALVANIZED STEEL Z-SHAPED VERTICAL POSTS INSTALLED ON 16 IN. CENTERS CURBSIDE. EXTRUDED ALUMINUM TOP AND BOTTOM RAILS WITH 1 3/8 IN. DEEP GALVANIZED STEEL Z-SHAPED VERTICAL POSTS INSTALLED ON 16 IN. CENTERS ROADSIDE.
LINER-SIDE	LINER-SIDES 3/8" PLYWOOD FULL
FRONT END	AERODYNAMIC ALUMINUM RADII WITH STEEL Z POSTS
SKINS-FRONT	.040 ALUMINUM PREPAINTED WHITE
LINER-FRONT	LINER-FRONT 1/2" PLYWOOD FULL
ROOF	.032 ONE PIECE ALUMINUM SHEET WITH ANTI-SNAG ROOF BOWS ON 24 IN. CENTERS WITH CROWNED ROOF DESIGN WHICH PREVENTS WATER/ICE POOLING AERODYNAMIC ALUMINUM RADIUS AND POLY-TUFF CORNER CAPS
INTERIOR LIGHTS	ONE INTERIOR LED DOME LAMP TOTAL DOMELIGHT(S) = 1; SWITCH WITH INDICATOR MOUNTED IN CAB DASH NOTE: MORGAN SWITCH CHOSEN. MORGAN WILL NOT USE CHASSIS OEM SWITCH.
LIFTGATE	WALTCO CW-20LB 36" X 72" 2000LB CAPACITY, STEEL WEDGE PLATFORM WITH WITH LOW BED OPTION
LIFTGATE OPTION	MORGAN - LIFTGATE POWER CUT-OFF SWITCH MOUNTED IN CAB DASH LIFTGATE 5" STRUCTURAL WITH 3"X12" RUBBER BUMPER BLOCKS

C SERIES FLIPAWAY GATE

WALTCO

2,000 lb Capacity

AN INDUSTRY FAVORITE IN MEDIUM DUTY FOLDING LIFTGATES, THE ENTRY LEVEL C-SERIES FLIPAWAY GATE CONTINUES TO RUN STRONG.

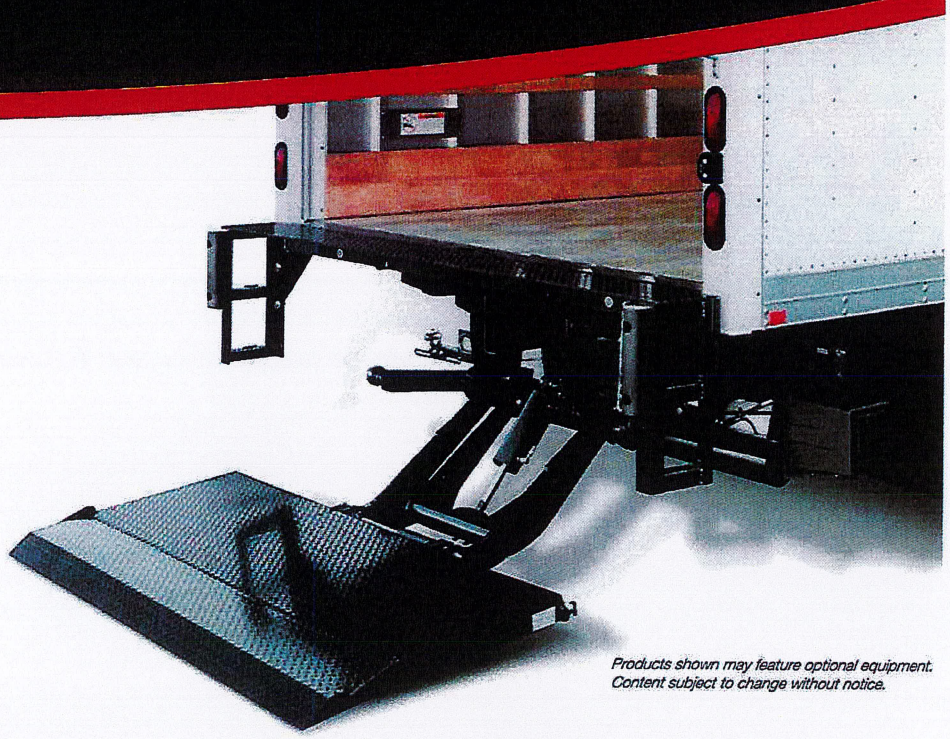

Products shown may feature optional equipment. Content subject to change without notice.

STANDARD C SERIES ADVANTAGES INCLUDE:

- Rugged steel full-dip (wedge) platform design.
- Low bed height application model accommodates bed height as low as 34".
- Power up/gravity down hydraulic system.
- Sturdy mid-arm design provides required strength while reducing unit weight.
- Torsion spring assist makes the platform easy to fold and unfold.
- Reduced Maintenance™ Features including:
  - Closed-loop hydraulic system to reduce potential for fluid contamination.
- All wiring and connections meet or exceed all TMC recommended practices.
- Charge line circuit protection.
- Power unit shipped pre-mounted from the factory.
- Weather-protective power unit enclosure.
- Powder coat finish with zinc primer on key liftgate components produces a high-quality finish that is exceptionally resistant to corrosion and abrasion.
- Dedicated Ground to ensure best conditions for reliable operation of your electrical components.

Full Dip Wedge Ride (Standard)

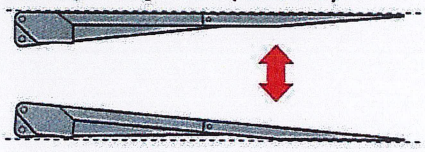

Platform auto adjusts as it lowers from bed level to ground level

Reduced maintenance and original Flipaway design means smoother, hassle-free deliveries.



C Series Gate in stowed position.